

The Company: Adventys.

ADVENTYS, based in Burgundy, France, developps, manufactures and markets kitchen equipment with induction technology for hotels, restaurants, and catering businesses. Our expertise, research and development team, and our integrated process define ADVENTYS and its objectives to give our customers the best induction solution. Thanks to our integrated manufacturing process, we are able to create custommade products and answer your requests: specific dimensions, look & design, and power.







Induction:

The Induction Technology is safe and offers more advantages than any other technology. Save energy, time and money, while enjoying more flexibility and precision. Induction is over 95% efficient: boil 3 liters of water in 3 minutes, and 5 liters in 6 minutes with our 6kw three phase generator.

Innovation:

Adventys' research and developpement team always works to develop new products and patents. With award winning products & best selling features, we are always working closely with chefs to offer them the best solution.

International:

Adventys is always expanding its limits. Now available in Europe, Middle East, Asia, Australia, & South America through Brazil. The company obtained UL & NSF approvals in 2015 to develop its business in North America.

Integration:

Adventys designs, creates, and manufacture all products on site, in Burgundy. With our electronic shop, our metal shop, our R&D department, and our assembly lines, the production is entirely made by us. Our products are 100% Made in France.











MATERIAUX INOX





Table of Content

Innovation 2017: Induc-NoLimit	P4
Buffet Induc-Stone Drop In Counter top	P5 P6 P7 P8
Geoline Countertop Drop In	P10-15 P16-17
Bioline Countertop Drop In	P18-21 P22-26
Heavy Duty Modular	P27-32
Induc-NoLimit	P33-35
Induction kits	P36
Induction planchas	P37
Stockpot	P 38
Custom-made	P 39
Accessories	P40-41



For any additional information and USB key, please contact: export@adventys.com
Find all our documentation on our website: www.adventys.com and 3D information on Masterchef.





Innovation 2018

Induc-NoLimit by ADVENTYS



World Premier

Adventys introduces its revolutionary Induc-NoLimit system - the first true commercial multi-zone induction solution.

A multi-zone induction unit eliminates designated pan placement - the entire surface becomes a cooking workspace. By offering different temperatures, the Induc-NoLimit system presents the operator with wide-ranging and precise cooking options: slide a pan from one side to the other to increase or decrease its temperature; or simply cook different foods at the same time, on the same surface. Create a limitless induction work zone for every chef - use any pan, at any place, at any temperature, and at any time! This patent-pending technology is very efficient & environmentally friendly - no more wasted energy and space.

A commercial multi-zone unit is ideal for chefs and cooks who require preparation capacity in the morning with larger pots, and later in the day perform sauté and finish work with smaller saucepans. Induc-NoLimit can be used anywhere in the kitchen, all day long with unlimited cooking possibilities. While traditional equipment is design to have one purpose, Adventys is breaking boundaries and making a multi-purpose, limitless unit.

You want to cook it: there is a way with Induc-NoLimit. Fry at high temperature: it's easy with Induc-NoLimit. Sous-Vide at very precise temperature and extended time: Induc-NoLimit is the solution. Fry and sous-vide at the same time on the same surface? Induc-NoLimit is the answer. You name it, Induc-NoLimit can do it!





Buffet



BUFFET

The UnderCounter by Adventys





by ADVENTYS






INDUC-STONE

- •Standard Power: 650 Watts.
- Power available: Under Counter unit is only available in 650 watts for a recommended installation of 2cm thickness of Granite other stone possible: please check with Adventys before installation.
- •Power supply: 230V AC 50/60 Hz (120V available)
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek NSF & UL standards.
- Details and options: including a power cord and a washable filter.
- •Chafing dish available page 32

•Réf: ADV1587

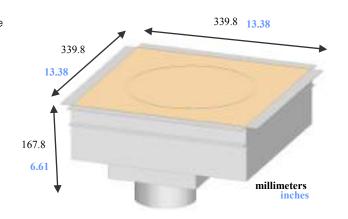

BUFFET

The Buffet line by Adventys






GL 650 DI: Drop in buffet with controls on top of the vitroceramic

GL 650 DIR: Drop in buffet with remote controls.

GL 650 DI / GL 650 DIR

- •Standard Power: 650 watts. Possibility to go from 400 watts up to 2200 watts (available at extra cost).
- •Stainless steel casing with chamfered edges & vitroceramic glass.
- Capacitive touches control panel (remote or not) On/Off, timer, manual temperature setting (+/-) with 2 digits display (works for both timer and power).
- •Power supply: 230V AC 50/60 Hz (120V available)
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek NSF & UL standards.
- •Only for warming, for more power, please refer to products page 10.
- Details and options: including a power cord and a whashable filter. Those models are available in a flushed version, without the stainless frame.
- •Chafing dish available page 30-32

•Ref: GL 650 DI: ADV1637 GL 650 DIR: ADV1638

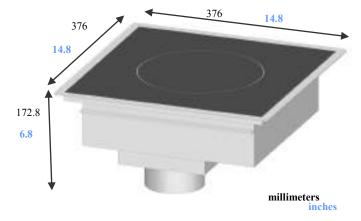



BUFFET

Counter top buffet line by Adventys

Small & light countertops, minimalist design for beautiful buffet setting.



ARIC 2200.


- •Standard Power: 2200 watts.
- •Stainless steel casing with vitroceramic glass.
- \bullet Capacitive touches control panel On/Off, manual power setting (+/-) with a 1 digit display.
- Power supply: 230V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.
- •Réf: ARIC 2200: ADV1503






- •Standard Power: 2800 watts.
- •Stainless steel casing with vitroceramic glass;
- \bullet Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display, timer control with 2 digits display, 3 presets for power levels: 6 10 12.
- Power supply: 230V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- •Details and options: including a power cord and a washable filter.
- Réf : NRIC 2800 : ADV1345



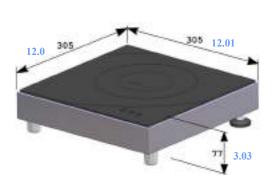

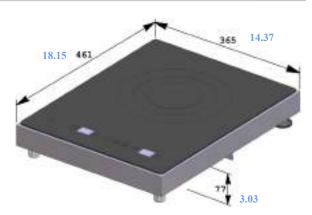



millimeters

inches





NEW SNACKING LINE 2018 by ADVENTYS



GLN 2500

- •Standard Power: 2500 watts.
- •Stainless steel casing with vitroceramic glass.
- \bullet Capacitive touches control panel On/Off, manual power & temperature setting (+/-) and boost touch.
- •Power supply: 230V- AC 50/60 Hz.
- $\bullet \text{Standards}$: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- •Details and options: including a power cord and a washable filter.

•Réf: GLN 2500: ADV1696



GLN 3000 / GLN 3500.

- •Standard Power: 3000 and 3500 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel - On/Off, manual power & temperature setting $\{+/-\}$ and boost touch.
- •Power supply: 230V- AC 50/60 Hz.
- $\bullet \text{Standards}$: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- •Details and options: including a power cord and a washable filter.

•Réf: GLN 3000: ADV1697 GLN 3500: ADV1702

GLN 2500



GLN 3000/3500







NEW SNACKING LINE 2018 by ADVENTYS



GLN2 3000 S.

- •Standard Power: 3000 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel - On/Off, manual power & temperature setting (+/-) and boost touch.
- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- •Details and options: including a power cord and a washable filter.

•Réf: GLN2 3000 S: ADV1698



GLN2 3000 F.

- •Standard Power: 3000 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel - On/Off, manual power & temperature setting $\{+/-\}$ and boost touch.
- Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.

•Réf: GLN2 3000 F: ADV1699

GLN2 3000 F

26.18 665 82 3.22

GLN2 3000 S







The Perfect Snacking Line

The GeoLine Range includes 2 sizes of single zone cooktops, 2 sizes of two zones cooktops, a Wok and a brand new Plancha.

Plug and Play!





UL 197


NSF-2

GL 1500 Pastry 230V/ GL 1800 120V

- •Standard Power: 1500 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) and timer control with 2 digits display (works for both timer and power).
- •Power supply: 230V AC 50/60 Hz 120V - AC 50/60Hz
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standard (only for the GL 1800 US 120V).
- Details and options: including a power cord and a washable filter.

•Réf : GL 1500 Pastry 230V: ADV1576 GL 1800 120V: ADV1618


GL 3000 / GL 3500.




- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) and timer control with 2 digits display (works for both timer and power).
- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standard (only for the GL 3000).
- Details and options: including a power cord and a washable filter.

•Réf: GL 3000: ADV1066 GL 3500: ADV1067

GL 1500 / GL 1800

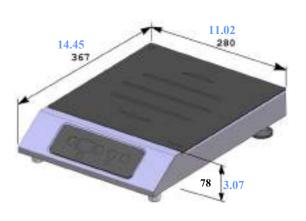

GL 3000 / GL 3500

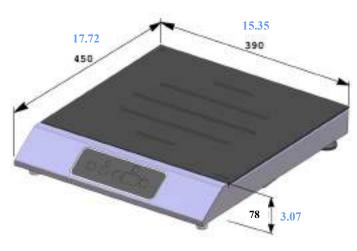

BADVENTYS

millimeters inches



GL2 3000 / GL2 3500.

- •Standard Power: 3000 and 3500 watts.
- •Dual cooking concept.
- •Stainless steel casing with vitroceramic glass.
- Capacitive touches control panel On/Off, right-left zone, 2 manual power setting (+/-) with 2 digits display, keep warm setting for buffet use.
- Power supply: 230V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.

•Réf: GL2 3000: ADV1370

GL2 3500: ADV1294





GLW 3000 / GLW 3500

- •Standard Power: 3000 and 3500 watts.
- •Stainless steel casing with wok bowl vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) and timer control with 2 digits display (works for both timer and power).
- Power supply: 230V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek NSF & UL standards.
- Details and options: a power cord, a washable filter and a wok pan included with unit.

GLW 3000: ADV1676 •Réf: GLW 3500: ADV1610

GLW 3000 / GLW 3500 GL2 3000 / GL2 3500 15.3 16.93 390 430 20.87 15.94 530 405 ADVENTYS millimeters



GL2 3000 S / GL2 5000 S / GL2 6000 S.

- •Standard Power: 3000, 5000 and 6000 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel (x2) On/Off, right-left zone, timer control, manual power setting (+/-) with 2 digits display (works for both timer and power).
- •Power supply: 230V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standards.
- Details and options: including power cord and a washable filter.

•Réf: GL2 3000 S: ADV1597 GL2 5000 S: ADV1619 GL2 6000 S: ADV1551



GL2 3000 F / GL2 5000 F / GL2 6000 F.

- •Standard Power: 3000, 5000. and 6000 watts.
- •Stainless steel casing with vitroceramic glass.
- Capacitive touches control panel On/Off, front-back zone, timer control, manual power setting (+/-) with 2 digits display (works for both timer and power).
- Power supply: 208-240V AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standards.
- Details and options: including a power cord and a washable filter.


•Réf: **GL2 3000 F**: **ADV1584**

GL2 5000 F: ADV1620 GL2 6000 F: ADV1594

GL2 5000 S / GL2 6000 S

405 15.95 650 25.59

GL2 3000 F / GL2 5000 F / GL2 6000 F

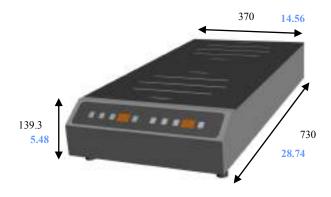







The Plancha by Adventys

INDUCTION GRIDDLE



Large Cooking Zone 688 x 384 mm / 27.09 x 15.12 inches

GLP 6000 / GLP 8000.


- •Standard Power: 6000 and 8000 watts.
- •Stainless steel casing with a grill surface in a multi layer composite material.
- •Temperature going from 60° to 250° Celsius degrees (140° to x482° Farenheit degrees).
- •Capacitive touches control panel (x2) On/Off, manual temperature setting (+/-) with 4 digits display.
- •Power supply:

GLP 6000 : 230V - AC 50/60 Hz. GLP 8000 : 400V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord (single phase) without plug and a washable filter. Spatula included upon request.

•Réf: GLP 6000: ADV1557 GLP 8000: ADV1556

GLP 6000/ GLP 8000

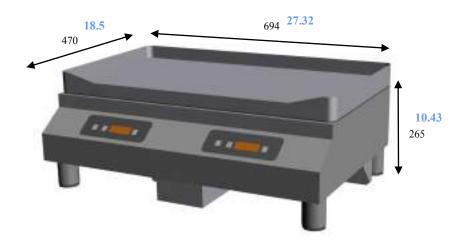



millimeters inches



The drop-in by Adventys





GL 3000 DI: Drop in with controls on top of the vitroceramic

GL 3000 DIR: Drop in with remote controls.

GL 3000 DI / GL 3000 DIR

•Standard Power: 3000 Watts.





- •Stainless steel casing with chamfered edges & vitroceramic glass.
- Capacitive touches control panel (remote or not) On/Off, timer, manual temperature setting (+/-) with 2 digits display (works for both timer and power).
- •Power supply: 230V AC 50/60 Hz
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standards.
- Details and options: including a power cord and a washable filter. Those models are available in a flushed version, without the stainless frame.

•Réf : GL 3000 DI : ADV1626 GL 3000 FL : ADV1627 GL 3000 FL : ADV1629

GL 3000 DI / GL 3000 DIR:

Flushed version available upon request:

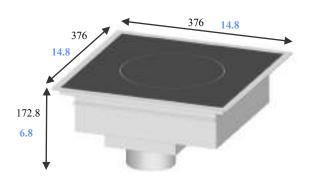

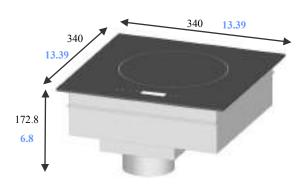





Two zones drop-in induction




GL2 3000 DIR / GL2 5000 DIR / GL2 6000 DIR.

- •Standard Power: 3000, 5000 or 6000 watts
- •Capacitive touches control panel (push button) On/Off, timer control, manual temperature setting (+/-) with 2 digits display (works for both timer and power).
- •Power supply: 230V AC 50/60 Hz
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standards.
- Details and options: including a power cord and a washable filter. Can be installed in front-to-back or side by side. Same dimensions as market's standards.

•Réf : **GL2 3000 DIR : ADV1621**

GL2 5000 DIR : ADV1622 GL2 6000 DIR : ADV1623

GL2 3000 DIR / GL2 5000 DIR / GL2 6000 DIR

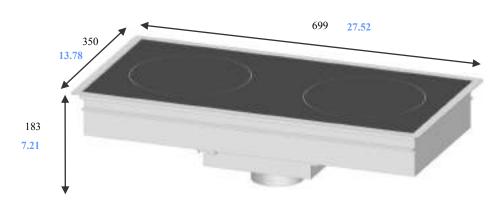





BIOLINE









BRIC 3000 & BRIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel On/Off

Power level or Watt level with 4 digits display. Temperature setting in C° or F° (+/-) with 4 digits display.

2 presets

Timer control with 2 digits display. Possibility to lock the keyboard. Quality pan control.

- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC, for Rohs and SGS as well as with Intertek NSF & **UL** standards.
- •Details and options: including a power cord and a washable filter.

Réf: BRIC 3000 : ADV1476 BRIC 3600: ADV1475



Drop in version page: 23




B2RIC 3000 & B2RIC 3600

- •Standard Power: 3000 and 3600 watts.
- •2 small zones or one large zone.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display for each zone.
- •Power supply: 230V- AC 50/60 Hz.
- •Details and options: including a power cord and a washable filter.


B2RIC 3000: ADV1337

B2RIC 3600: ADV0923

BRIC 3000 / BRIC 3600

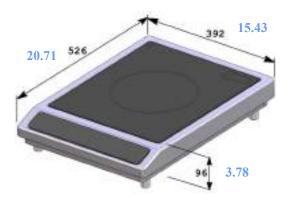

B2RIC 3000 / B2RIC 3600

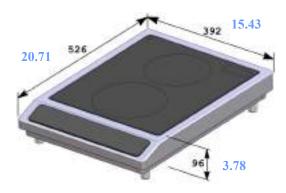





Single Phase



BWIC 3000 / BWIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with wok bowl vitroceramic glass.
- •Capacitive touches control panel On/Off, power level setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek **NSF & UL** standards.
- Details and options: including a power cord, a washable filter and a wok pan.

•Réf: BWIC 3000: ADV1607 BWIC 3600: ADV1606




BGIC 3000 / BGIC 3600.


- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with a grill surface in a multi layer composite material.
- Capacitive touches control panel On/Off, manual temperature setting (+/-) with 4 digits display & 3 presets.
- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter. Spatula available upon request.

•Réf: BGIC 3000: ADV1339 BGIC 3600: ADV1360

BWIC 3000 / BWIC 3600

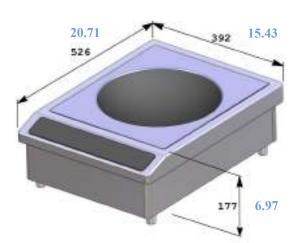

BGIC 3000 / BGIC 3600

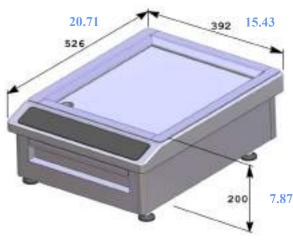









Three Phases



BTIC 4000 / BTIC 6000.

- •Standard Power: 4000 and 6000 watts.
- •Stainless steel casing with vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.

BTIC 4000: ADV1378 •Réf: BTIC 6000: ADV1129



BTWIC 4000 / BTWIC 6000.

- •Standard Power: 4000 and 6000 watts.
- •Stainless steel casing with wok vitroceramic glass.
- •Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- •Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- $\bullet \mbox{Details}$ and options: including a power cord, a washable filter $% \left(1\right) =\left(1\right) =\left(1\right)$ and a wok pan.


BTWIC 4000: ADV1482 •Réf: BTWIC 6000: ADV1483



BTIC 4000 / BTIC 6000

20.7 15.5 526 180

BTWIC 4000 / BTWIC 6000

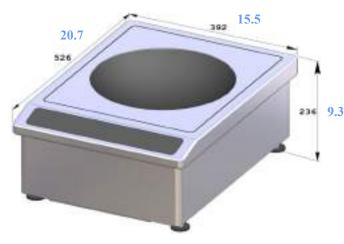






BADVENTYS





DRIC 3000 / DRIC 3600

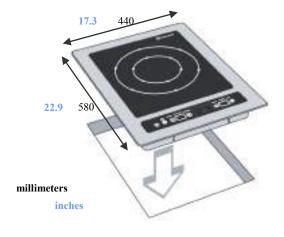

Cut out dimensions: 410 x 550 mm

DRIC 3000 / DRIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with chamfered edges & vitroceramic glass.
- Capacitive touches control panel On/Off

Power level or Watt level with 4 digits display. Temperature setting in C° or F° (+/-) with 4 digits display.

Timer control with 2 digits display. Possibility to lock the keyboard.

Quality pan control.

- Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC, for Rohs and SGS as well as with Intertek NSF & **UL** standards.
- \bullet Details and options: including 1m60 (5 ft 3 inches) power cord and a washable filter (wash regularly).

• Details : **DRIC 3000 : ADV 1478**

DRIC 3600: ADV1471









D2RIC 3000 / D2RIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with chamfered edges and vitroceramic glass.
- •2 small zones or one large zone.
- \bullet Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display for each zone.
- •Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- •Details and options: including a power cord and a washable filter.

•Réf: D2RIC 3000: ADV1446 D2RIC 3600: ADV1279






D2IC 6000 / D2IM 6000


- •Standard Power: 6000 and 6000 watts.
- •Stainless steel casing with chamfered edges and vitroceramic glass.
- \bullet Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display for each zone.
- •Knobs control Two 360° knobs with led light.
- •Power supply: 230V AC 50/60 Hz.
- \bullet Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.

•Réf: D2IC 6000: ADV1527 D2IM 6000: ADV1537

D2RIC 3000 / D2RIC 36000



D2IC 6000 / D2IM 6000

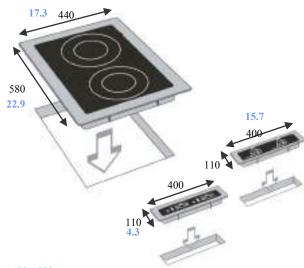

Cut out dimensions: 410 x 550 mm





DWIC 3000 / DWIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with chamfered edges & with wok bowl vitroceramic glass.
- •Capacitive touches control panel On/Off, power level setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- Power supply: 230V- AC 50/60 Hz.
- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs & with Intertek NSF & UL standards.
- •Details and options: including a power cord, a washable filter and a wok pan.

DWIC 3000: ADV1609 •Réf·

DWIC 3600: ADV1608






DGIC 3000 / DGIC 3600.

- •Standard Power: 3000 and 3600 watts.
- •Stainless steel casing with chamfered edges and a grill surface in a multi layer composite.
- •Capacitive touches control panel On/Off, manual temperature setting (+/-) with 4 digits display & 3 presets.
- •Power supply: 230V- AC 50/60 Hz.
- $\bullet \textbf{Standards: complies with European Standards for safety of electrical appliances for EMC } \\$
- Details and options: including a power cord and a washable filter. Spatula available upon request.


DGIC 3000: ADV1408 •Réf:

DGIC 3600: ADV1349

DWIC 3000 / DWIC 3600

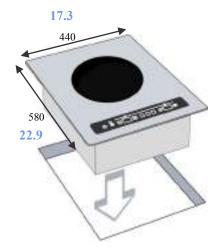

DGIC 3000 / DGIC 3600

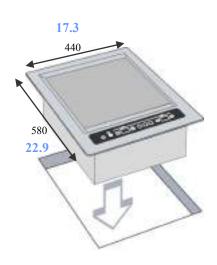

Cut out dimensions: 410 x 550 mm



Three Phases



DTIC 4000 / DTIC 6000.

- •Standard Power: 4000 and 6000 watts.
- Stainless steel casing with chamfered edges & with vitroceramic glass.
- Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord and a washable filter.

•Réf: DTIC 4000: ADV1342 DTIC 6000: ADV1369



DTWIC 4000 / DTWIC 6000.


- •Standard Power: 4000 and 6000 watts.
- $\bullet \textbf{Stainless steel casing with chamfered edges \& with wok vitroceramic glass. } \\$
- Capacitive touches control panel On/Off, manual power setting (+/-) with 2 digits display, 3 presets, timer control with 2 digits display.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.


- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs.
- Details and options: including a power cord, a washable filter and a wok pan.

•Réf : DTWIC 4000 : ADV1346 DTWIC 6000 : ADV1438

DTIC 4000 / DTIC 6000

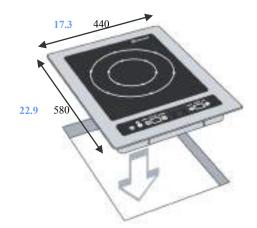

DTWIC 4000 / DTWIC 6000



Cut out dimensions: 410 x 550 mm









CUPBOARDS



Cupboard 400

- •Stainless steal construction.
- •Specialy adapted for our heavy duty line.
- •Removable door.
- •Holes for evacuation of planchas cooking juices.
- •Designed and made in France.

•Réf : **ADV1685**











CUPBOARDS



Cupboard 800

- •Stainless steal construction.
- •Specialy adapted for our heavy duty line.
- •Removable door.
- \bullet Holes for evacuation of planchas cooking juices.
- •Designed and made in France.

•Réf : **ADV1686**









MODULAR



MO2I 8000.

- •Standard Power: 8000 watts.
- •Two cooking zones induction.
- •Stainless steel casing with vitroceramic glass 6mm thickness.
- •360° Knob controls with 4 digits power display for each zone.

• Power supply: 220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- •Option: including washable filters. Power cord available upon request.

•Réf: **ADV1656**



MO2I 12000.

- •Standard Power: 12000 watts.
- •Two cooking zones induction.
- •Stainless steel casing with vitroceramic glass 6mm thickness.
- •360° Knob controls with 4 digits power display for each zone.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- Option: including washable filters. Power cord available upon request.

•Réf: **ADV1657**

MO2I 8000



MO2I 12000









MODULAR



MO4I 16000 / MO4I 24000.

- •Standard Power: 16000 and 24000 watts.
- Four cooking zones induction.
- •Stainless steel casing with vitroceramic glass 6mm thickness..
- •360° Knob controls with 4 digits power display for each zone.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- $\bullet \text{Standards}$: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- Option: including washable filters. Power cord available upon request.

•Réf: MO4I 16000 : ADV1658 MO4I 24000 : ADV1659



MOWI 7000.

- •Standard Power: 7000 watts.
- •Modular Wok
- $\bullet \text{Stainless}$ steel casing with chamfered edges & with wok vitroceramic glass.
- •360° Knob controls with 4 digits power display for each zone.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- •Option: including washable filters. Power cord and wok pan.

•Réf: MOWI 7000: ADV1661

MO4I 16000 / MO4I 24000



MOWI 7000









MODULAR

INDUCTION **GRIDDLE**



MOP2I 8000.

- •Standard Power: 8000 watts.
- •Modular Plancha with two independent heating zones.
- •Stainless steel casing with a grill surface in a multi layer composite material.
- •360° Knob controls with 4 digits temperature display.
- •Power supply:

220V - AC 50/60 Hz.

400V - AC 50/60 Hz.

440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- •Option: including washable filters. Power cord and spatula available upon request.

•Réf: MOP2I 8000: ADV1660



MOP4I 16000.

- •Standard Power: 16.000 watts.
- •Modular Plancha with four independent heating zones.
- •Stainless steel casing with a grill surface in a multi layer composite material.
- •360° Knob controls with 4 digits temperature display.

•Power supply: 220V - AC 50/60 Hz.

400V - AC 50/60 Hz.

440V - AC 50/60 Hz.

- •Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs
- •Option: including washable filters. Power cord and spatula available upon request.


MOP4I 16000: ADV1678 •Réf·

MOP2I 8000

400 15.7



MOP4i 8000

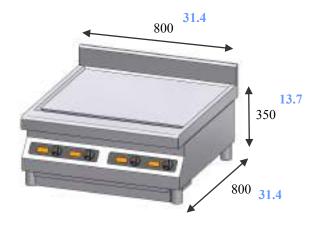







Induc-NoLimit

by ADVENTYS



Induc-NoLimit by ADVENTYS

MULTI-ZONE MODULAR VERSION

NEW



MO4NL: Multi-zone induction modular version

- •Standard Power: 32.000 watts.
- •16 inductors covering the entire vitroceramic surface.
- •Stainless steel casing with vitroceramic glass 6mm thickness.
- •Capacitive touches control panel and incremental encoder.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

 $\bullet \text{Standards}$: complies with European Standards for safety of electrical appliances for EMC and for Rohs

•Réf: MO4NL: ADV1703



MO4NL 32000



MULTI-ZONE KITSVERSION

NEW



KNL4: Multi-zone induction kit 8000 W KNL4 S: Induction squeier 8000 W

- Multi-zone induction kit to integrate.
- •Power: 8000 W vitroceramic: 360 x 360 mm.
- 4 inductors covering the entire vitroceramic surface.
- •Capacitive touches control panel and incremental encoder.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

• Awarded SMART LABEL INNOVATION HOST Milano 2017.

•Réf: KNL4: ADV1669 KNL4S: ADV1712



NEW



KNL8: Multi-zone induction kit 16.000 W

- Multi-zone induction kit to integrate.
- •Power: 16.000 W vitroceramic: 360 x 690 mm.
- •8 inductors covering the entire vitroceramic surface.
- $\bullet \hbox{\it Capacitive touches control panel and incremental encoder. } \\$
- •Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

• Awarded SMART LABEL INNOVATION HOST Milano 2017.

•Réf: KNL8: ADV1670



NEW



KNL16: Multi-zone induction kit 32.000 W

- •Multi-zone induction kit to integrate.
- •Power: 32.000 W vitroceramic: 690 x 690 mm.
- •16 inductors covering the entire vitroceramic surface.
- •Capacitive touches control panel and incremental encoder.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

• Awarded SMART LABEL INNOVATION HOST Milano 2017.

•Réf: KNL16: ADV1662








INDUCTION KITS

KTi1: Integrate induction kit 4000/6000 W



- •Vitroceramic dimensions: 320 x 320 thickness 6 mm or 360 x 360 thickness 6 mm.
- •Deported controls (1,5m) with capacitiv touches control panel with 4 digits display or with 360° knob with 4 digits display.



220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

•Compatible with TERA WATT energy optimizer.

	KTi1 4000	KTi1 6000
	4000W version Knob control with 4 digits display Vitroceramic: 360 x 360 mm	6000W version Knob control with 4 digits display Vitroceramic: 360 x 360 mm
Integrated generator	ADV1704	ADV1706
Deported generator (1,5m)	ADV1705	ADV1707

KTi2: Integrate induction kit 2 zones 8000/10.000/12.000 W

- •Standard power: 8000 / 10.000 or 12.000 W.
- •Vitroceramic dimensions: 360 x 690 thickness 6 mm or 325 x 600 thickness 6 mm.
- •Deported controls (1,5m) with capacitiv touches control panel with 4 digits display or with 360° knob with 4 digits display.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

•Compatible with TERA WATT energy optimizer.

Deported generator (1,5m)	ADV1708	ADV1709
Integrated generator	ADV1677	ADV1688
	8000W version Knob control with 4 digits display Vitroceramic : 360 x 690 mm	12.000W version Knob control with 4 digits display Vitroceramic: 360 x 690 mm
	KTi2 8000	KTi2 12000



KTWi: Integrate induction wok 4000 / 6000 W

- •Standard power: 4000 or 6000 W.
- •Deported controls (1,5m) with capacitiv touches control panel with 4 digits display or with 360° knob with 4 digits display.
- •Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

•Compatible with TERA WATT energy optimizer.

ADV1710	ADV1711
4000W version Deported generator (1,5m) Knob control with 4 digits display Vitroceramic + frame : 360 x 360 mm	6000W version Deported generator (1,5m) Knob control with 4 digits display Vitroceramic + frame: 360 x 360 mm
KTWi 4000 D	KTWi 6000 D



INDUCTION PLANCHA



P1IM 4000.

- •Standard Power: 4000 watts.
- •Induction Plancha with one zone. Cooking surface: 330 x 300mm.
- •Stainless steel casing with a grill surface in a multi layer composite material. Cooking surface: 330 x 300mm.
- •360° Knob controls with 4 digits temperature display drop in.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

•Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs

Option: including washable filters. Power cord, plug and spatula available upon request.

•Réf: P1IM 4000: ADV1653



P2IM 8000.

- •Standard Power: 8000 watts.
- •Induction Plancha with two independent heating zones.
- •Stainless steel casing with a grill surface in a multi layer composite material. Cooking surface: 630 x 300mm.
- •360° Knob controls (x2) with 4 digits temperature display drop in.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz. 440V - AC 50/60 Hz.

•Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs

Option: including washable filters. Power cord, plug and spatula available upon request.

P2IM 8000: ADV1654



P4IM 16000. QUATTRO.

- •Standard Power: 16000 watts.
- •Induction Plancha with four independent heating zones.
- •Stainless steel casing with a grill surface in a multi layer composite material. Cooking surface: 630 x 710mm.
- •360° Knob controls (x4) with 4 digits temperature display drop in.
- Power supply:

220V - AC 50/60 Hz. 400V - AC 50/60 Hz.

440V - AC 50/60 Hz.

•Standards: complies with European Standards for safety of electrical appliances for EMC and for Rohs

Option: including washable filters. Power cord , plug and spatula available

P4IM 16000: ADV1655 •Réf:






STOCKPOT



FISP 6000 : Three-phases 6000 W Stockpot

- $\bullet \mbox{Stainless}$ steel casing with vitroceramic glass 6mm thickness.
- •Standard power : 6000 W.
- •Knob control + led.
- •Special product for cooking pots and large volume cooking.
- $\bullet \text{Standards}$: complies with European Standards for safety of electrical appliances for EMC and for Rohs

•Réf: FISP 6000: ADV1687

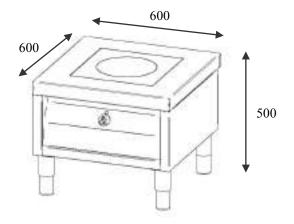



CUSTOM MADE



CUSTOM MADE FURNITURE

ADVENTYS induction kit, wok, plancha, multizone, saucier Fryers

Bain-marie Pasta cooker



...

Ask for more information



ACCESSORIES

Round chafing dish diameter 40 cm Ref : ADV1641



Chafing dish GN2/3 Ref : ADV1642



Chafing dish GN1/1 Ref : ADV1643



Round porcelain dish diameter 40 cm Compatible with induction

Ref: AC00019



Porcelain plate GN2/3 Compatible with induction

Ref: AC00018



Porcelain plate GN1/1 Compatible with induction

Ref: AC00017



Wok

Ref: AC00001



Wok

Ref: AC00005







ACCESSORIES

Induc-Stone spacer



Additional fan kit Ref : EMP0242



Empty rack for 2 generators

Ref: EMP0237

Empty rack for 4 generators Ref: EMP0238



Spatule spéciale plancha



Three-phase kit funnel MX01754



Frame for kits integration

320 x 320 mm (ref:EMP0353)

340 x 340 mm (ref:EMP0422)

360 x 360 mm (ref:EMP0354)

600 x 325 mm (ref:EMP0460)

690 x 360 mm (ref:EMP0355)



BGIC / DGIC protection

Ref: ADV1245



TESTIMONIES

838383





William Boquelet Chef Restaurant *La Pomme* 1 Michelin Star Chef William is one of the first users of Adventys Induction Plancha Quattro.

« Being one of the first to use Adventys plancha, I have to say I am thrill with its power, its quickness, its efficienty, and its flexibilty; along the fact that I am saving power. The precision of the plancha is sublime and there is no way I would like to go back to a tradition griddle. »



Fabrice Noir - Chef and Owner of Restaurants Le Cheval Noir et L'Air du Temps in Beaune.

« Adventys Induction gives you the freedom of movement and creativity, &simplicity. Both our restaurant are equiped with Adventys and I would not want it any other way. Cherry on top is the gain in cleaning time we have made from switching to our old gaz kitchen, to our Adventys Induction kitchen. »



Alexandre Couillon Chef La Marine Noirmoutier 1 Michelin star

« At La Marine, our cooking is contemporary marine and 100% vegetal iodine, Adventys Induction and its flexibility gives us the power to grow our creativity. Start a shrimp broth at 110°C, add in it a fish and maintain in temperature at 58°C, without stopping everything else you are doing in the Kitchen. Induction sublimate products' quality...»



Thierry Molinengo Chef and Right hand of Guy Martin Grand Véfour 2 Michelin Stars

Not only greener, the mastery of temperature will help Chefs create new recipes, which is for us, Chefs, a comfort and a usage without limits. »



Jérôme Roy Chef au Cloître Mane-en-Provence

« After you try and use Adventys Induction it is very hard to go back to other cooking devices.

Third restaurant opening, third kitchen equipped by Adventys Induction. Its advantages are translated by a beautiful design, an easy cleaning process, speed, flexibility, security and of course by saving energy, power, and time. Cooking on Induction is cooking up to date. »







(ADVENTYS)



MADE IN BURGUNDY

Adventys

Route de Pagny 21250 SEURRE France

Phone: + 33 380 204 615 Fax: + 33 380 204 219 Mail: export@adventys.com

Website: www.adventys.com







