

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 15
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	1180 (1800) m³/h
Nominal static pressure	400 Pa
Sound pressure	46 Db
Heat exchanger	Rotativo
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 15
Supply voltage	230 V/1 fase/50Hz


ELECTRIC SCHEME

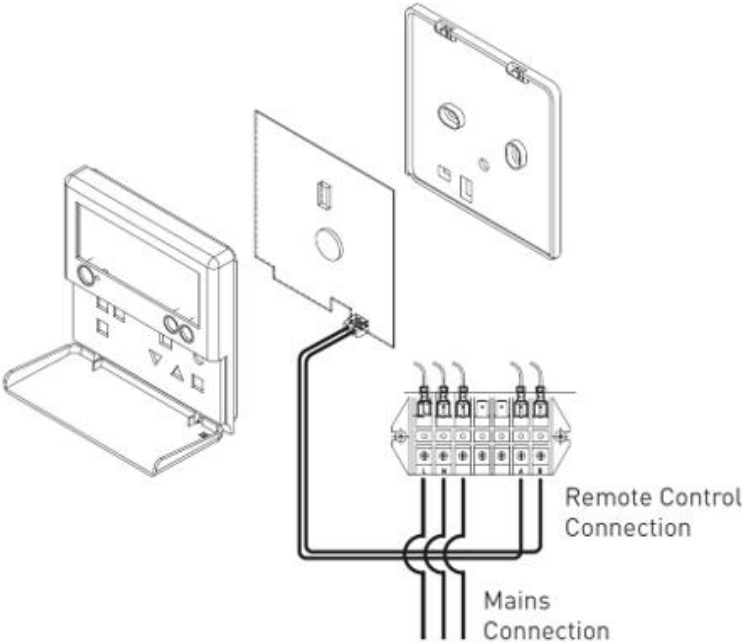

UNIT DIMENSIONS												
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	L (mm)	M (mm)	N (mm)	X (mm)	Y (mm)
EVO-R 15	1295	990	155	1700	760	910	205	360	415	520	350	310

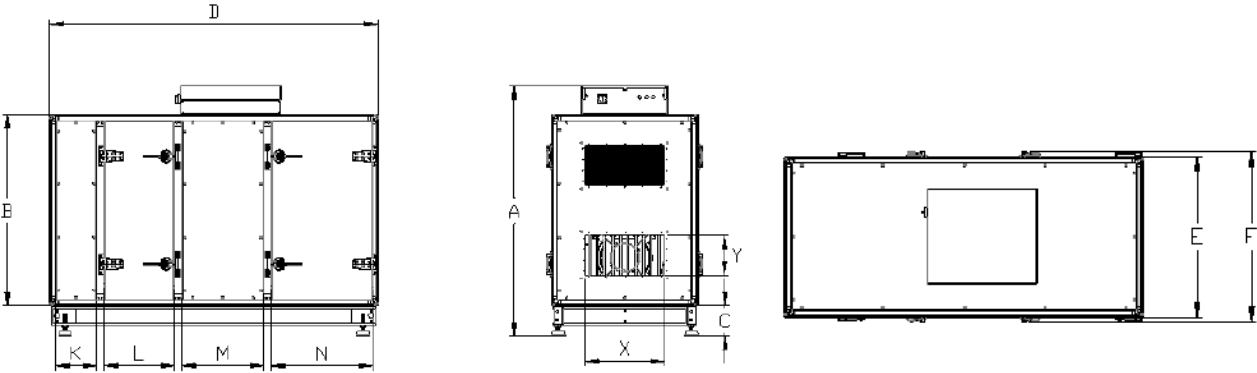


UNIT INSTALATION

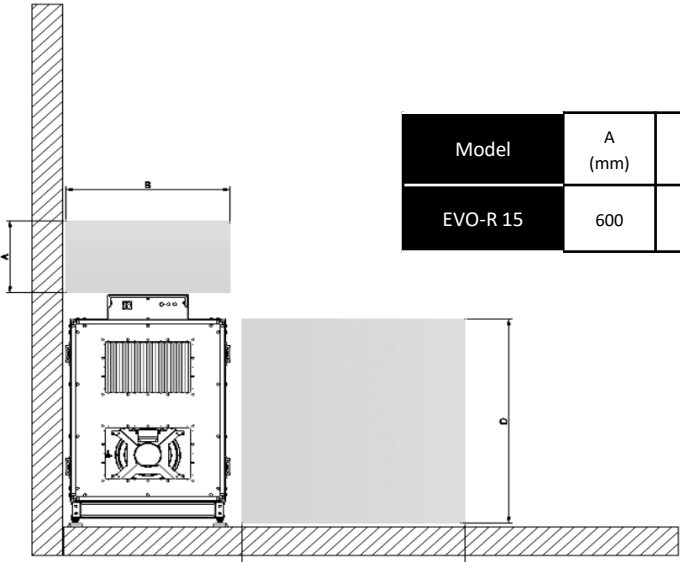

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 15	600	910	1360	1145

STATIC PRESSURE GRAPHS

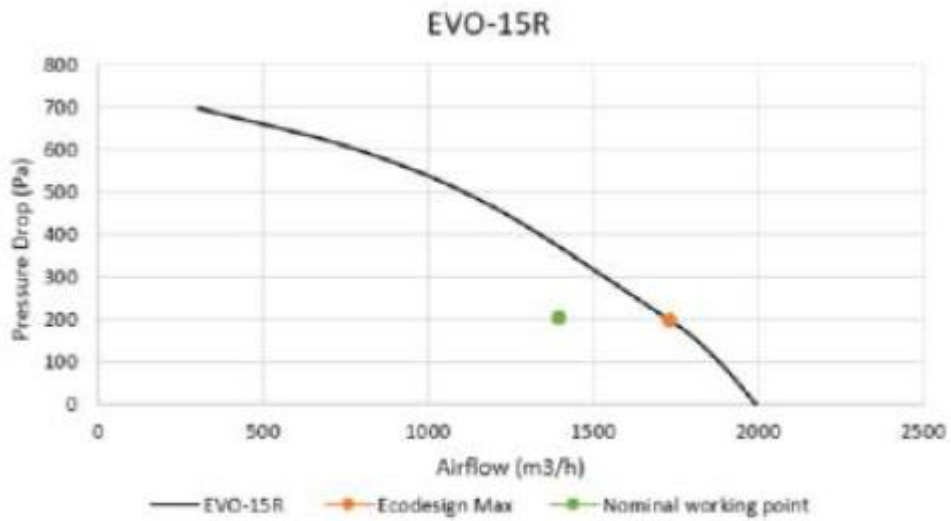

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 20
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	1400 (2350) m³/h
Nominal static pressure	400 Pa
Sound pressure	53 dB
Heat exchanger	Rotativo
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 20
Supply voltage	230 V/1 fase/50Hz


ELECTRICAL SCHEME

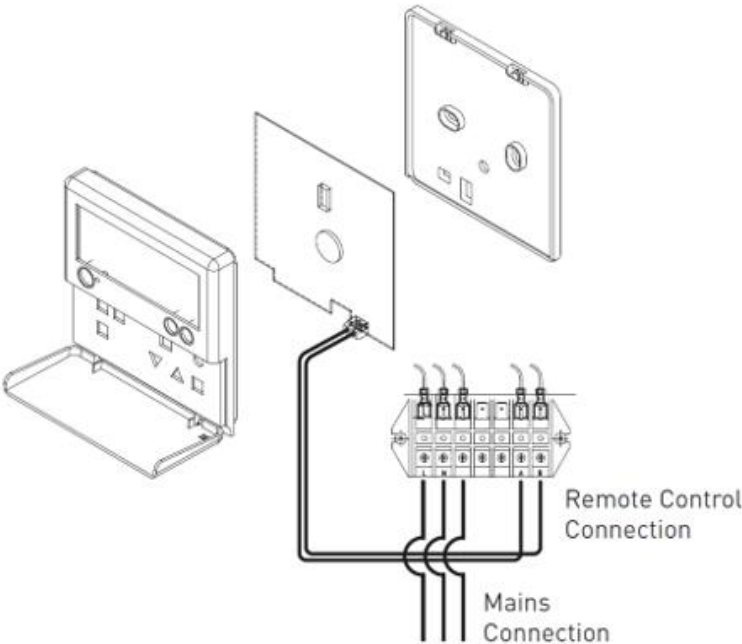

UNIT DIMENSIONS												
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	L (mm)	M (mm)	N (mm)	X (mm)	Y (mm)
EVO-R 20	1400	1090	155	1700	860	1010	205	360	415	520	470	310

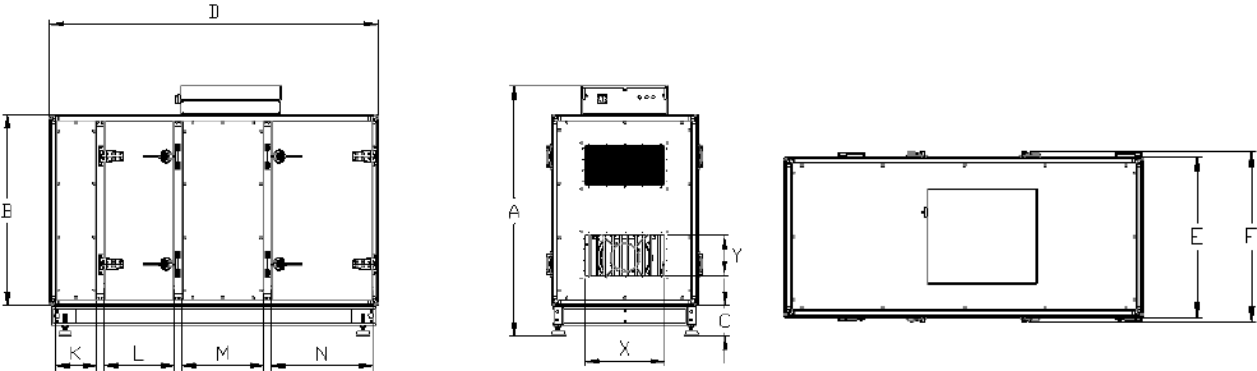


UNIT INSTALATION

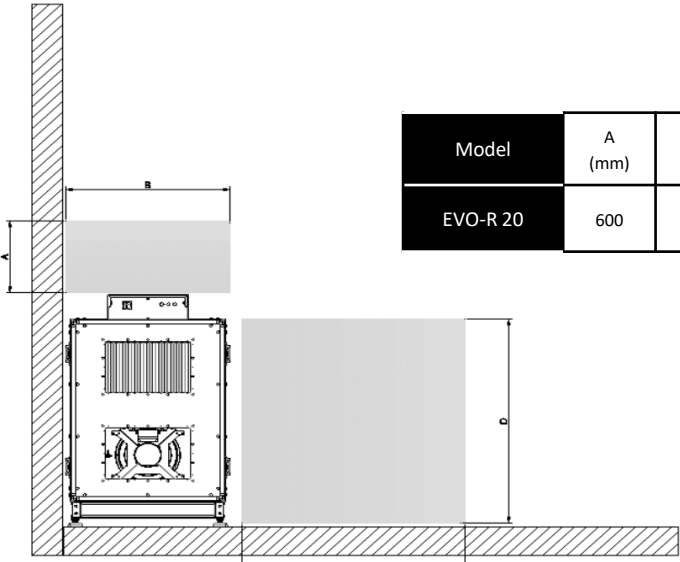

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 20	600	1010	1460	1245

STATIC PRESSURE GRAPHS

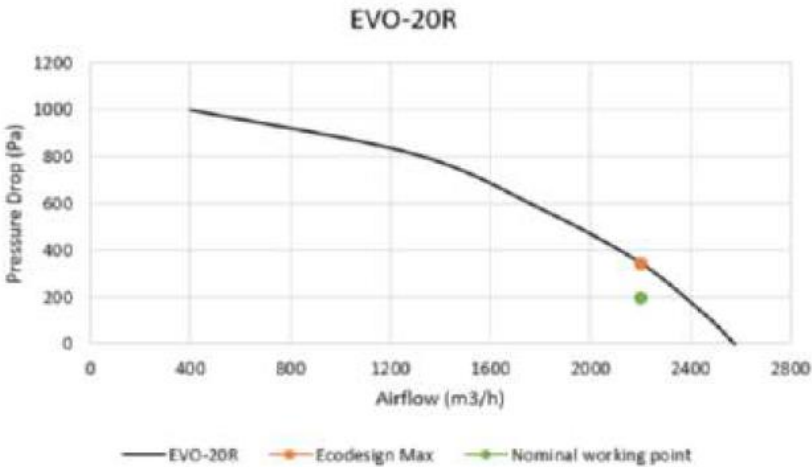

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 30
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	2700 (3860) m³/h
Nominal static pressure	400 Pa
Sound pressure	53 dB
Heat exchanger	Rotative
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 30
Supply voltage	380 V/3 phases/50Hz


ELECTRICAL SCHEME

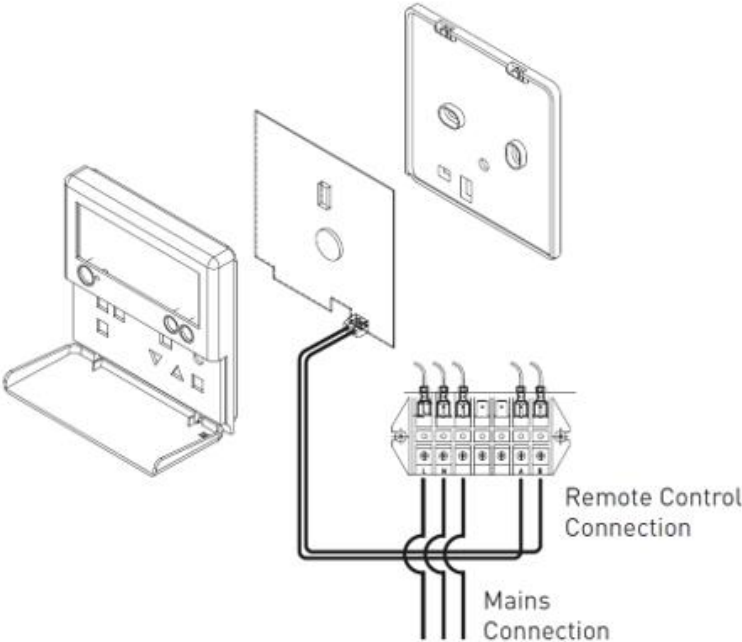

UNIT DIMENSIONS												
Modelo	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	L (mm)	M (mm)	N (mm)	X (mm)	Y (mm)
EVO-R 30	1500	1200	155	1700	970	1120	205	360	415	520	580	410

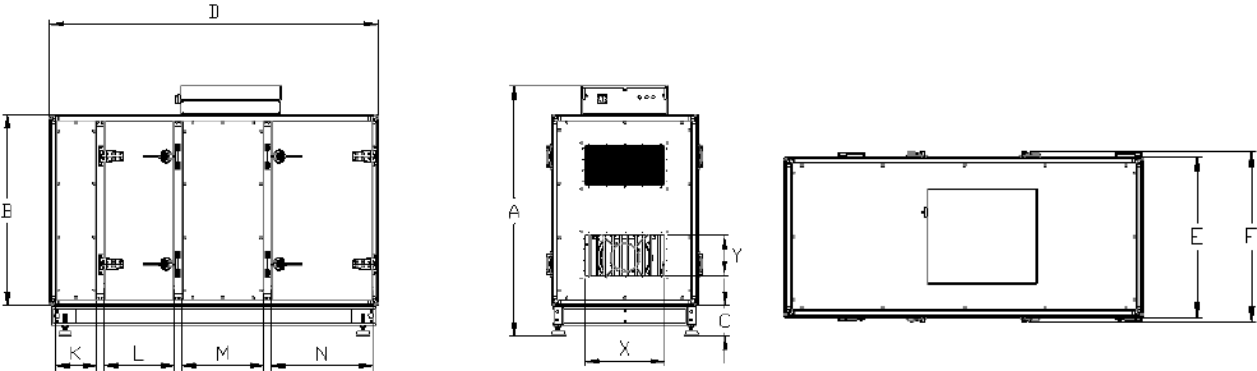


UNIT INSTALLATION

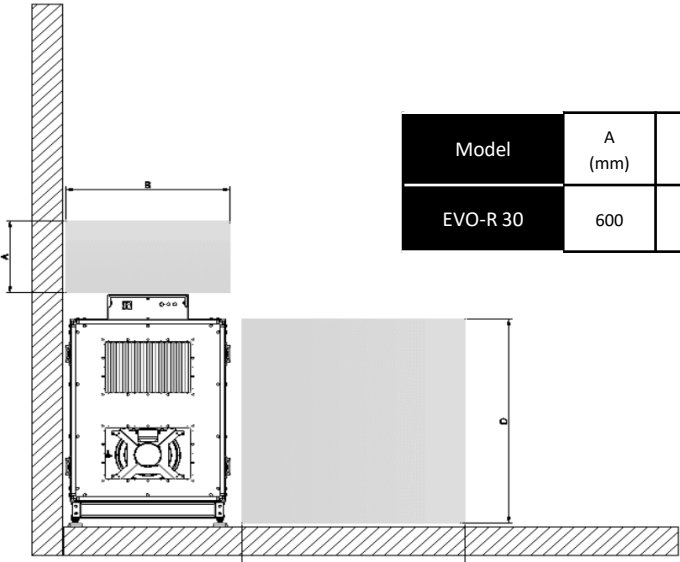

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 30	600	1120	1570	1355

STATIC PRESSURE GRAPHS

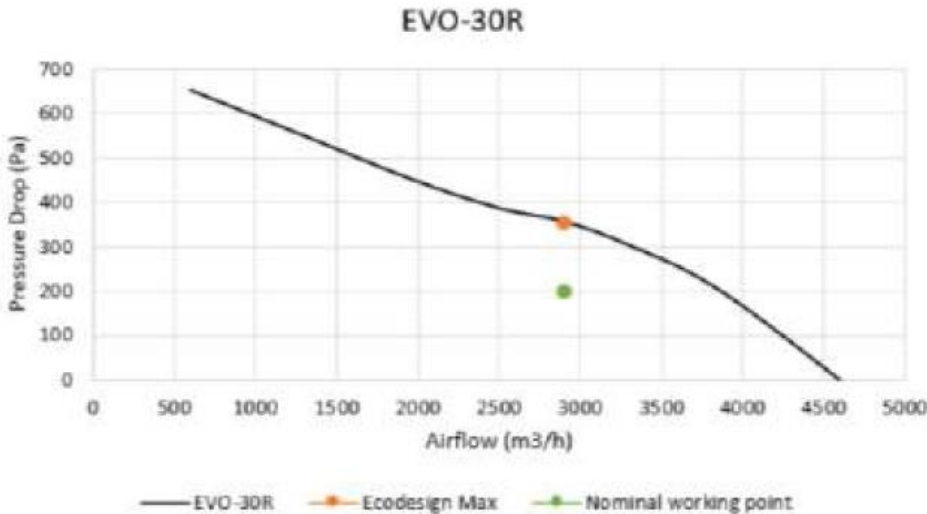

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 50
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	4300 (5810) m³/h
Nominal static pressure	400 Pa
Sound pressure	60 dB
Heat exchanger	RotativE
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 50
Supply voltage	380-415 V/3 fases/50Hz


ELECTRICAL SCHEME

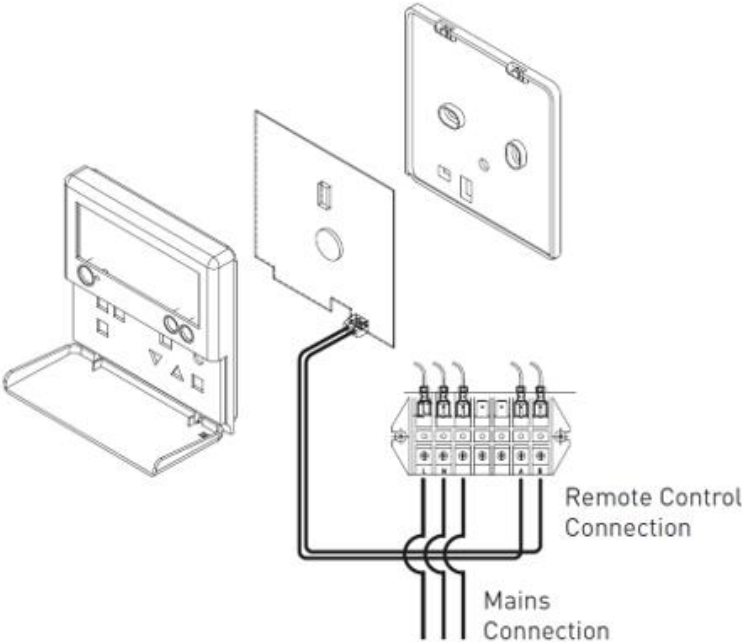

UNIT DIMENSIONS													
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	M (mm)	P (mm)	R (mm)	S (mm)	X (mm)	Y (mm)
EVO-R 50	1775	1470	155	1845	1240	1390	610	1230	555	440	690	855	410

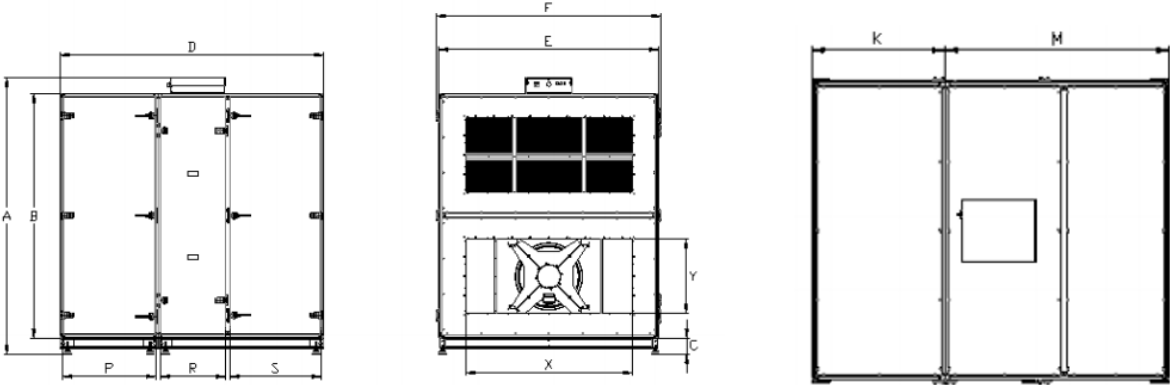


UNIT INSTALATION

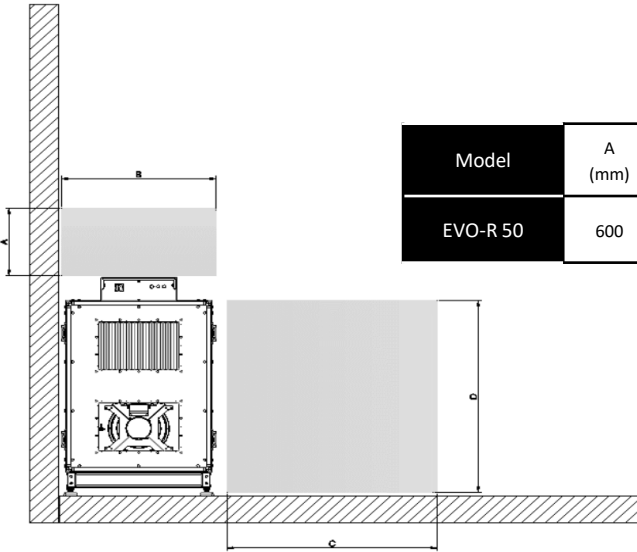

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 50	600	1390	1840	1625

STATIC PRESSURE GRAPHS

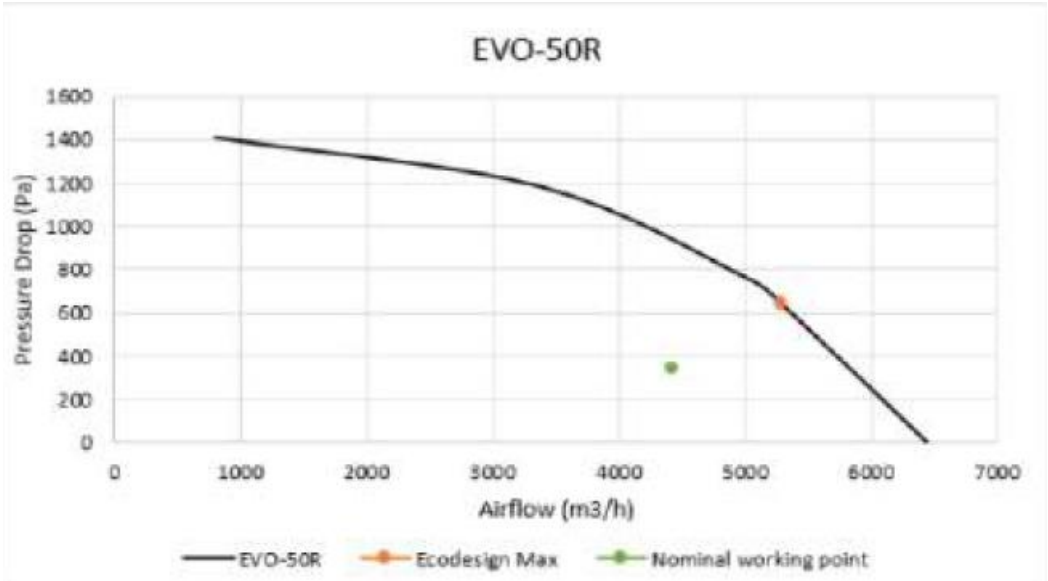

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 60
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	5100 (6810) m³/h
Nominal static pressure	400 Pa
Sound pressure	60 dB
Heat exchanger	Rotative
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 60
Supply voltage	380-415 V/3 fases/50Hz


ELECTRICAL SCHEME

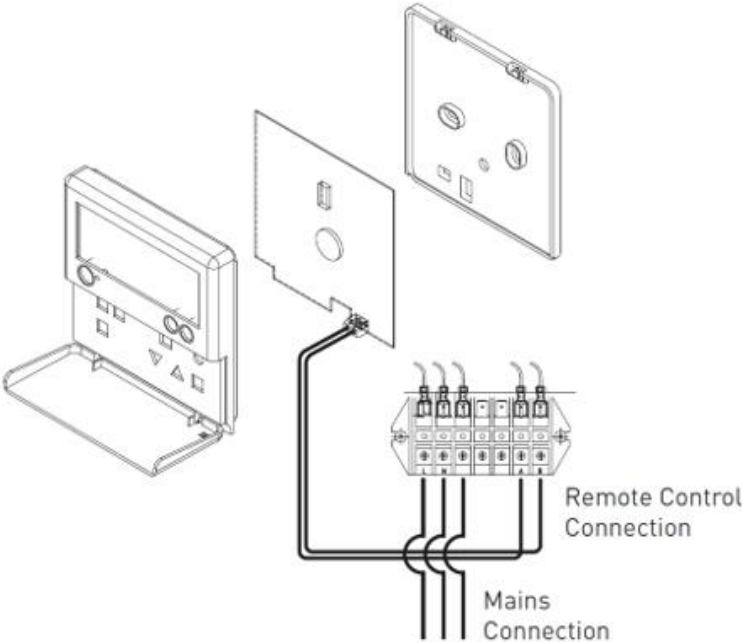

UNIT DIMENSIONS													
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	M (mm)	P (mm)	R (mm)	S (mm)	X (mm)	Y (mm)
EVO-R 60	1895	1590	155	2015	1360	1510	680	1330	625	480	748	855	410

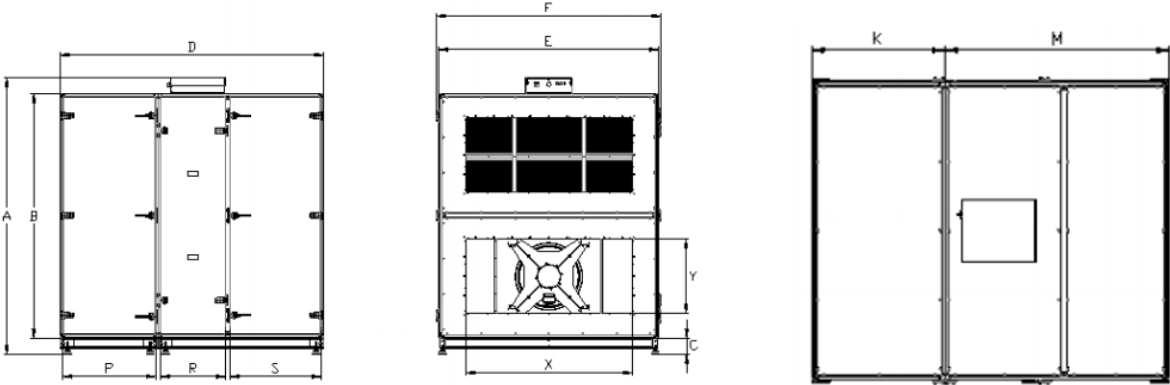


UNIT INSTALLATION

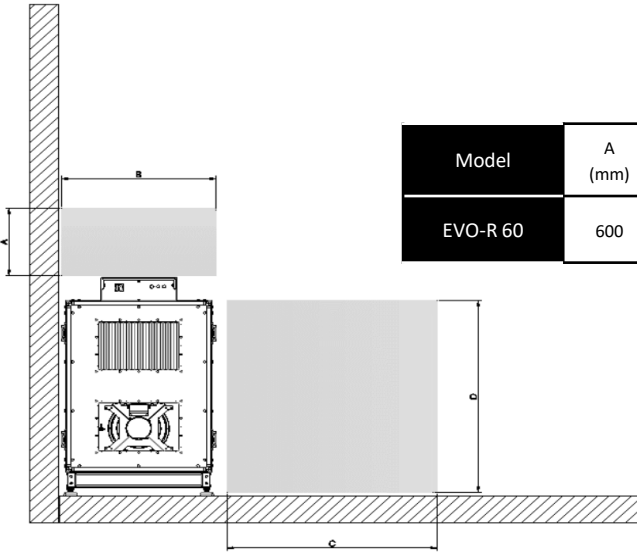

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 60	600	1510	1960	1745

STATIC PRESSURE GRAPHS

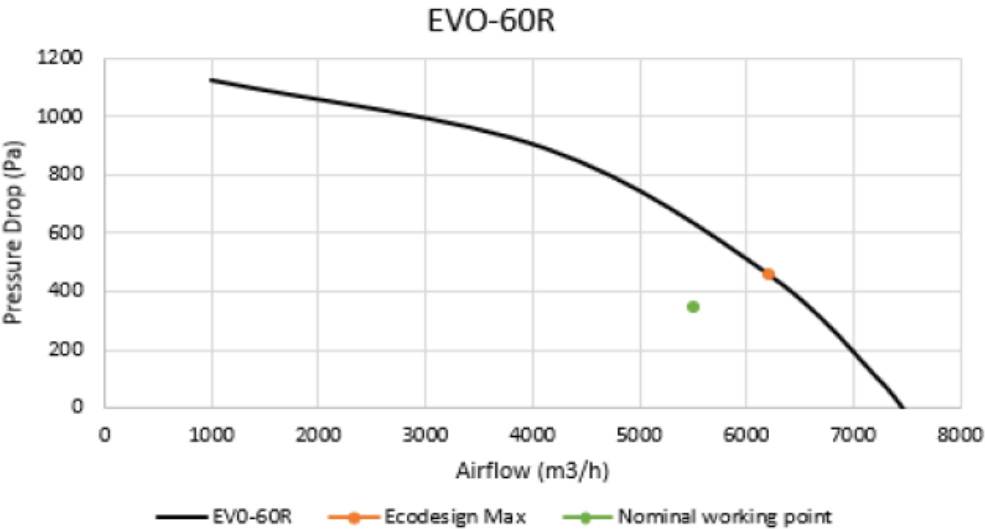

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT



FEATURES	
Model	EVO-R 80
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	7350 (9460) m³/h
Nominal static pressure	400 Pa
Sound pressure	59 dB
Heat exchanger	Rotativo
By-Pass	Yes
Filter status	Yes


ELECTRICAL CONNECTION	
Model	EVO-R 80
Supply voltage	380-415 V/3 fases/50Hz

ELECTRIC SCHEME

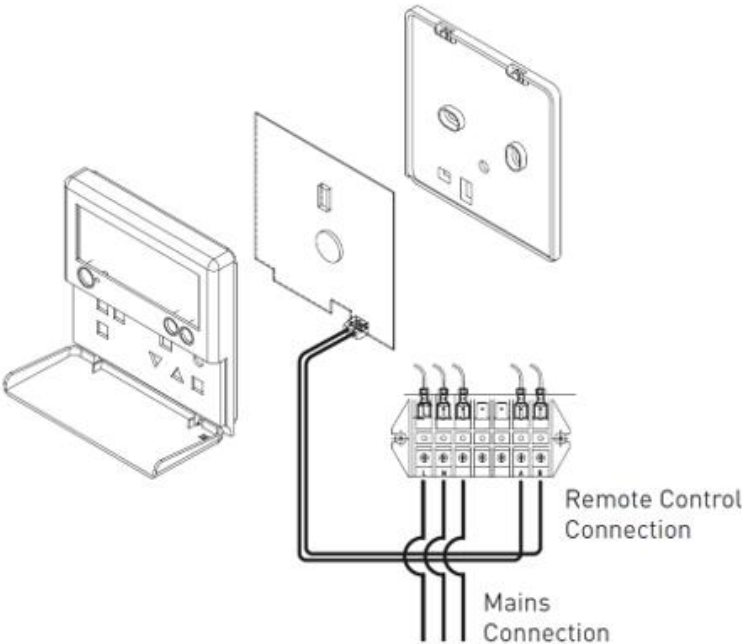


UNIT DIMENSIONS

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	M (mm)	P (mm)	R (mm)	S (mm)	X (mm)	Y (mm)
EVO-R 80	2145	1840	155	2100	1610	1760	750	1350	-	-	-	1055	410

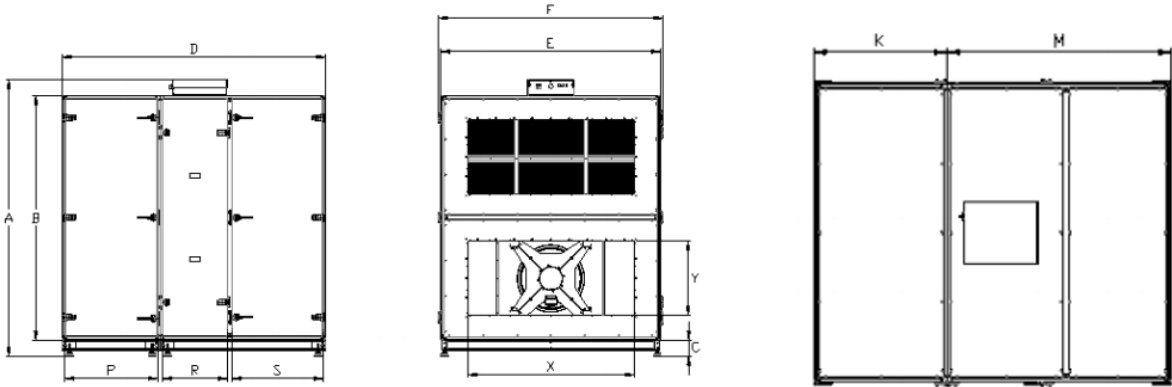


UNIT INSTALATION

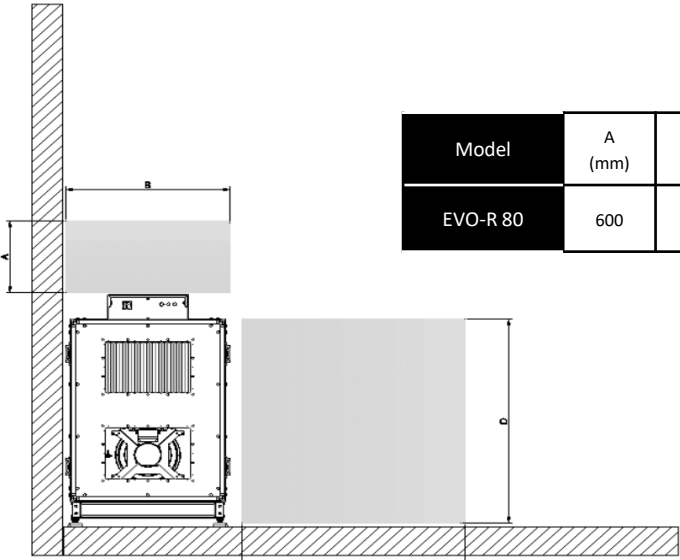

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 80	600	1760	-	1995

STATIC PRESSURE GRAPHS

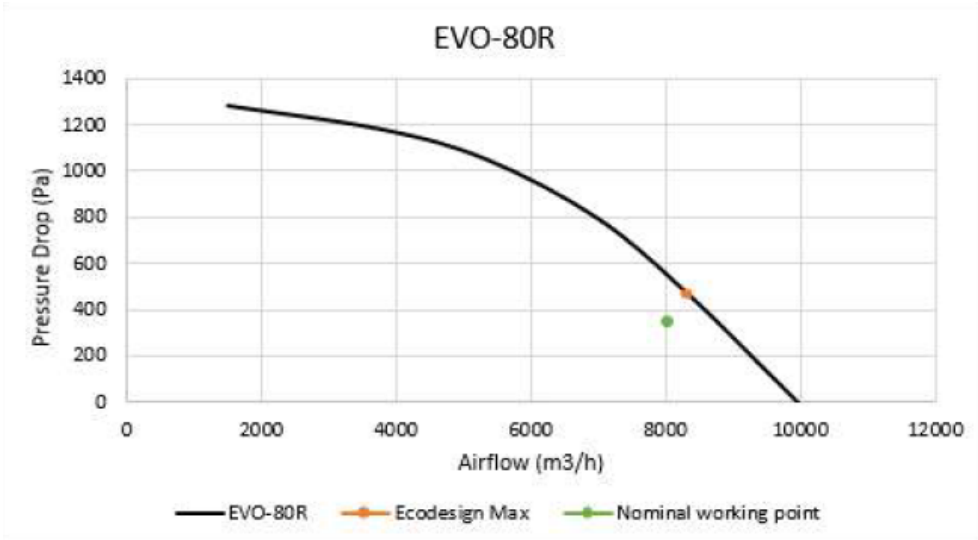

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 120
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	12000 (14750) m³/h
Nominal static pressure	400 Pa
Sound pressure	62 dB
Heat exchanger	Rotativo
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 120
Supply voltage	380-415 V/3 fases/50Hz


ELECTRIC SCHEME

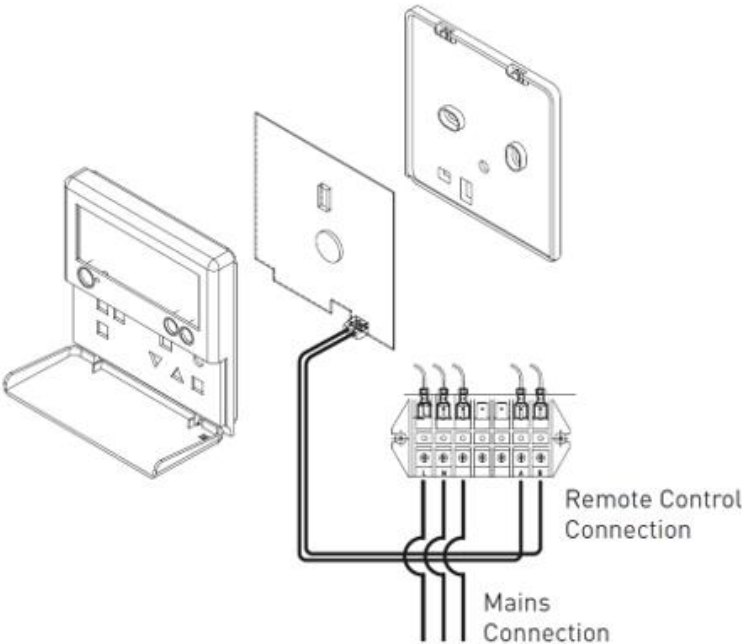

UNIT DIMENSIONES													
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	M (mm)	P (mm)	R (mm)	S (mm)	X (mm)	Y (mm)
EVO-R 120	2400	2090	155	2450	1860	2010	895	1550	840	605	845	1475	510

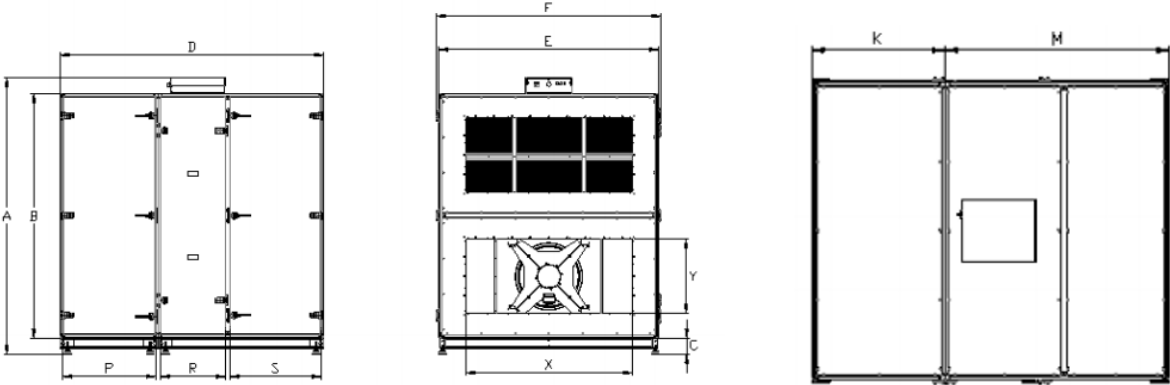


UNIT INSTALLATION

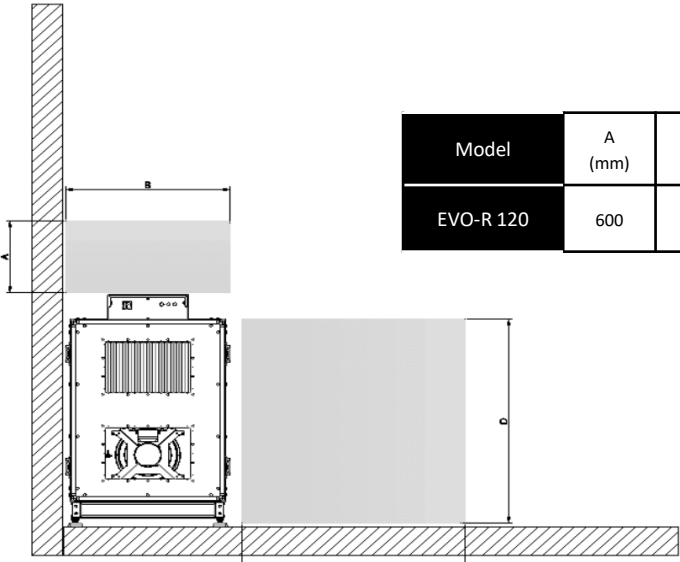

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 120	600	2010	2460	2245

STATIC PRESSURE GRAPHS

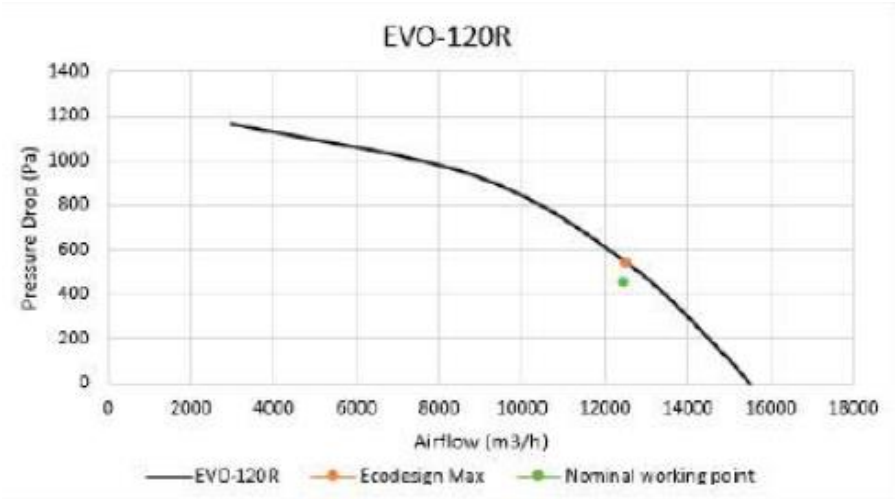

PRODUCT SHEET


HEAT RECOVERY RANGE
EVO-R UNIT




FEATURES	
Model	EVO-R 150
Thermic efficiency	75%
Humidity efficiency	74%
Nominal airflow (max.)	15000 (17620) m³/h
Nominal static pressure	400 Pa
Sound pressure	58 dB
Heat exchanger	Rotative
By-Pass	Yes
Filter status	Yes

ELECTRICAL CONNECTION	
Model	EVO-R 150
Supply voltage	380-415 V/3 phases/50Hz


ELECTRIC SCHEME

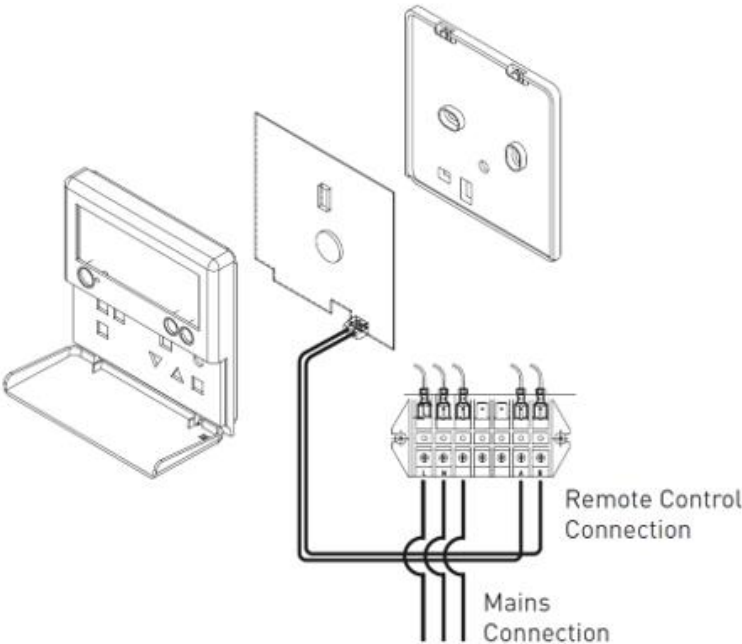

UNIT DIMENSIONS													
Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	K (mm)	M (mm)	P (mm)	R (mm)	S (mm)	X (mm)	Y (mm)
EVO-R 150	2645	2340	155	2535	2110	2260	940	1590	890	620	870	1600	710

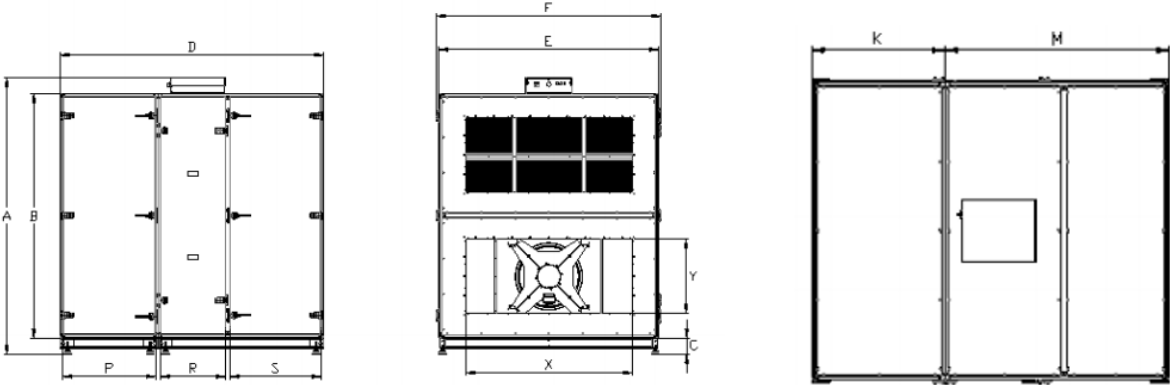

UNIT INSTALATION

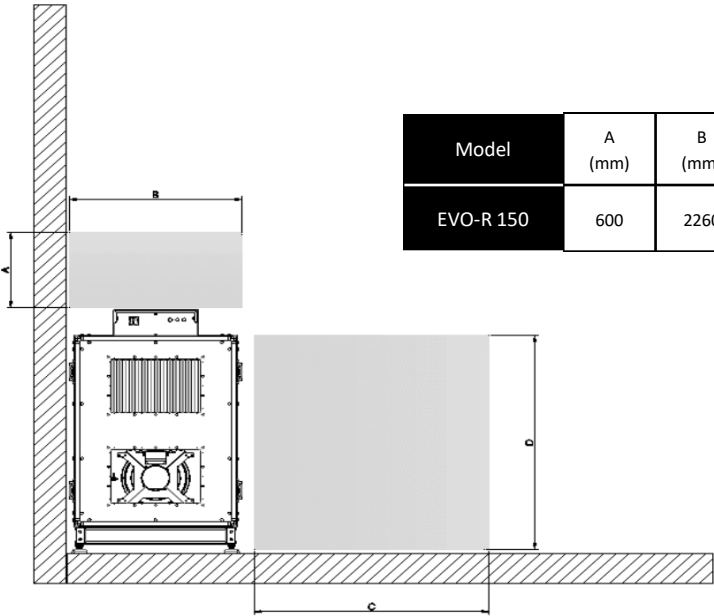

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVO-R 150	600	2260	2710	2495

STATIC PRESSURE GRAPHS

