Serve Every Dish with Confidence.

The Menumaster line of heavy-duty compact ovens offer powerful heating performance in a space-saving design. Durable and stackable, this oven is ideal for hard-use, high-volume operations. The unique method of energy distribution provides superior even-heating, so your customers will notice your food, not your foods' temperature.

Key Features

- ◆ 1800 Watts of power for fast heating.
- ◆ Ample 17 liter capacity easily accommodates a standard half-pan.
- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four Stage Cooking Option for one-touch cooking. Reduces prep time, labor and food waste while providing consistent results.
- 11 power levels for consistent, delicious results for frozen and fresh foods. Food can go from freezer to table in minutes.
- Unique method of energy distribution provides superior even-heating.
- User-friendly controls are easy to use and require minimal user training.
- Space-saving stackable design.
- Interior ceramic shelf is sealed and recessed to help reduce plate to shelf edge impact and keep spills contained.
- Interlock switch assembly is engineered for maximum durability and long life.
- X2 Multiple quantity pad calculates the proper cook times for multiple portions.
- Durable stainless steel exterior and interior for years of commercial foodservice use.
- Worldwide service network provides ongoing product support.

DEC18E2 1800 Watts

COMMERCIAL MICROWAVE OVEN



A Powerful Oven that Provides ...

- Superior even-heating for consistent, delicious results
- Incredible durability for years of dependable use
- Easy ownership, maximum efficiency and profits

Maximize Your Profits

Built to handle the fast pace and grueling demands of the busiest kitchens. It's a high-performing, heavy-duty unit that's ideal for fast, single-portion throughput in:

Casual Dining Busy Vending Sites


Ouick Service Restaurants and More!

DEC18E2

1800 Watts

COMMERCIAL MICROWAVE OVEN

JPC Code	719881159317	Cabinet	Exterior Dimensions		Usable Interior Dimensions	
Configuration	Countertop	Height	343 mm	(13-1/2")	171 mm	(6-3/4")
Control System	Touch	Width	425 mm	(16-3/4")	330 mm	(13")
Programmable Control Pads	0-9	Depth (overall with handle)	578 mm	(22-3/4")	305 mm	(12")
Total Programmable Settings	Depth (door open 90°)	940 mm(37")				
Cooking Timer	60:00, Countdown	Usable Cavity Space	17 Liters (0.6 cubic ft.)			
Power Levels	11	Outercase Material	Stainless Steel			
Defrost	Yes, Power Level 2	Cavity Interior Finish	Stainless Steel with Sealed-in Ceramic Shelf			
Time Entry Option	Yes	Electrical Characteristics	DEC18E2			
Microwave Distribution System	Rotating Antenna	Power Consumption	2900 W, 12.6 A			
Magnetron(s)	2	Power Output	1800 W			
Display	VFD	Power Source	230 V, 50 Hz, 16 A single phase			
Stackable	Yes	Plug Configuration	CEE 7/7 <u>"Schuk</u> o"; 16 A			
Stage Cooking	4 stages		\odot			
Interior Light	Yes	— Frequency	2450 MHz			
Door Opening System	Grab and Pull Handle	— Power Cord Length	1.7 m (5'6")			
Signal	Adjustable End of Cycle	 Weight/Shipping Information 				
Removable Filter	Yes	Net Weight	30 kg (67 lbs.)			
Multiple Quantity Setting	Yes, up to 2 portions					
Warranty Full 1-Year, I	Limited 3-Year on Magnetron Tube Only	Approximate Shipping	33 kg (73 lbs.) 625 mm L x 556 mm W x 473 mm H			
		Shipping Box Size			n W x 473 mı '' W x 18-5/8'	

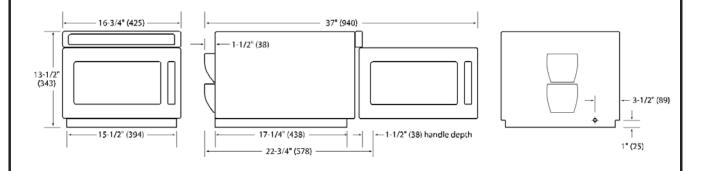

MENUMASTER[®] Commercial



Model DEC21E2 shown

Heavy Volume This category of microwave is ideal for...

Applications:

- Quick service restaurants
- Fast casual dining
- Bars & grills

Defrost:

- Defrosts most frozen food products

Heavy Volume

Menumaster Commercial Microwave Model DEC21E2

Power Output

- 2100 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming.
 Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- Ample 17 liter (.6 cubic ft.) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Gasket sealed ceramic trey to reduce plate-to-shelf edge impact and keep spills contained.


Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- ETL Listed.





Menumaster Commercial Microwave Model DEC21E2 | Heavy Volume

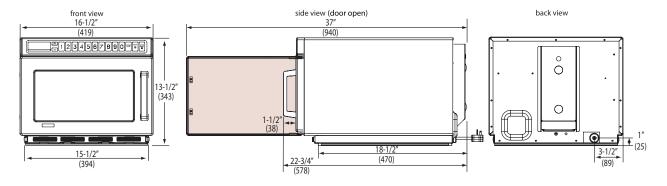

Installation Clearances - Top: 7" (178), Sides: 1" (25), Back: None

Drawings available from KCL CADlog - techs@kclcad.com

Specifications				S
Model	DEC21E2	UPC Code 719	881167718	C
Configuration	Countertop	ı		p it
Control System	Touch			
Programmable Control Pads	10			tv st
Settings Programmable	100			aı
Max. Cooking Time	60:00			1
Power Levels	11			р
Defrost	Yes, power leve	el 2		W
Time Entry Option	Yes			aı
Microwave Distribution	Double rotating antennas, top and bottom			
Magnetrons	2			
Display	LED			e: m
Stackable	Yes			SE
Stage Cooking	Yes, 4			0
Door Opening	Grab and pull handle			st
Signal	Adjustable, end of cycle			re
Air Filter	Yes, removable, with clean filter reminder			ily
Multiple Portion Setting	Yes, up to 2 por	rtions		h
Exterior Dimensions	H 343 (13 ½")	W 419 (16 ½")	D** 578 (22 ¾	") aı
Cavity Dimensions	H 171 (6 ¾")	W 330 (13")	D 305 (12")	a
Door Depth	940 mm (37"), 9	0°+ door open		
Usable Cavity Space	17 liter (.6 cubic	c ft.)		W
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel with gasket sealed ceramic tray			
Power Consumption	3100 W, 13.5 A			w
Power Output*	2100 W* Micro	wave		
Power Source	230V, 50 Hz, 16	A single phase		
Plug Configuration / Cord	CEE 7/7 "Schuk	o" 1.7m (5′ 6″)	•••	
Frequency	2450 MHz			
Product Weight	31 kg (68 lbs.)			
Ship weight (approx.)	34 kg (74 lbs.)			
Shipping Carton Size	H 473 (18 %")	W 556 (21 %")	D 625 (24 5/8")	

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu tems and shall have automatic cooking capability for up to wo portions. Cooking timer shall be 60 minute, countdown tyle with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 2100 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass outer vindow and a grab and pull handle with 90°+ opening for easy access. The large 17 liter (6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Gasket sealed ceramic tray to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have emovable, cleanable splatter shield. Air filter shall be easly accessible and removable from the front of the oven and nave a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety.

Narranty

Narranty Certificate for this product can be found by locating t on the ACP, Inc. website at:

www.acpsolutions.com/warranty

Measurements are in millimeters





^{*} IEC 60705 Tested

^{**} Includes handle

Quality Food, Fast.

The Menumaster® MOC5241

In the foodservice business time is money. Make the most of your time by utilizing one of the most powerful commercial ovens you can buy — the Menumaster MOC5241. Dependable and durable, this oven provides fast, even-heating and superior food quality.

Key Features

- ◆ 2400 Watts of power for fast heating.
- 9 Liters usable cavity space
- Unique "jigsaw" shaped footprint allows for back-to-back placement on a 724mm shelf.
- Door automaticall opens at end of cook cycle and remains open until next cook cycle begins.
- Up to 100 programmable menu items simplifies cooking and ensures consistent results
- Control panel located on bottom for convenient access and angled for easy viewing.
- Four Stage Cooking Option for one-touch cooking. Reduces prep time, labor and food waste while providing consistent results.
- Door extends out for easy cleaning.
- Plug and play operation
- Durable stainless steel exterior and interior for years of commercial foodservice use.
- Worldwide service network provides ongoing product support.
- Limited 3 year warranty.

MOC5241 2400 Watts

COMMERCIAL MICROWAVE OVEN



A Powerful & Cost-Effective Way to ...

- Serve quality food, quickly
- Increase food sales and profits
- Cook fresher, hotter foods on demand

Maximize Your Profits


The powerful Menumaster MOC5241 is built to handle the fast pace and grueling demands of the busiest kitchens. It's a high-performing, heavy-duty unit that's ideal for boost-heating. Perfect for use in:

High-Volume Chains

COMMERCIAL MICROWAVE OVEN

SPECIFICATIONS						
LIDC Code	705105607206	Cabinat	Exterior		Usable Inte	
UPC Code	705105607306	<u>Cabinet</u>	Dimensions Dimensions			
Configuration	Countertop or shelf	Height	451 mm	(17-3/4")	136 mm	(5-3/8")
Control System	Touch	Width	346 mm	(13-5/8")	298 mm	(11-3/4")
Programmable Control Pads	10	Depth (overall with handle)	473 mm	(18-5/8")	222 mm	(8-3/4")
Total Programmable Settings 100		Usable Cavity Space	9 Liters (.319 cubic ft.)			
Cooking Timer	10:00	Outercase Material	Stainless Steel			
Power Levels	11	Cavity Interior Finish	Stainless Steel with Sealed-in Ceramic Shelf			nic Shelf
Defrost	Yes	Electrical Characteristics				
Microwave Distribution System	Rotating Antenna	Power Consumption	3100W			
Magnetron(s)	2	Power Output	2400 W			
Display	LED	Power Source	230 V, 50 Hz, 16 A			
Stackable	Yes		single phase			
Stage Cooking	4 stages	Plug Configuration	CEE7/7 "Schuko"			
Door Opening System	Automatic opening	Frequency	2450 MHz			
Signal Door automatically opens at end ofcycle		Power Cord Length	133mm (5-1/4")			
Automatic Voltage Sensor	Yes			133111111 (.	0-1/4)	
Warranty	Limited 3 Year	Weight/Shipping Information				
warranty	Littlice 5 Teal	Net Weight		32 kg (7	0 lbs.)	
		Approximate Shipping		33 kg (7	3 lbs)	
		Shipping Box Size D: 5	524mm (20-5/	/8") x W: 432n	nm (17:") x H	l: 559mm (22")

ACP's continuing commitment to quality products may mean a change in specification without notice. Certified to IEC60335-2-90 meeting particular requirement for commercial microwave ovens.

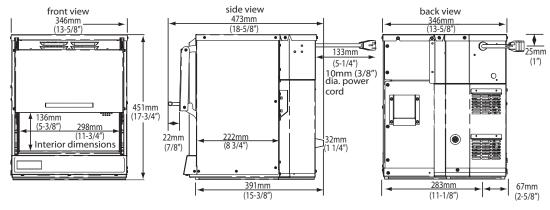

MENUMASTER[®] Commercial



Model MSO5211 shown

Heavy Volume

This category of microwave is ideal for...

Applications:

- Schools
- Healthcare Facilities
- Buffets
- Cafeterias
- Stadiums
- Supermarkets
- Fast Casual Restaurant

Defrost:

- Defrosts most frozen food products

Throughput Potential:

- 4.5 kg (10 lb.) baby red potatoes, 3 per hour
- 3.5 kg (8 lb.) frozen vegetables, 4 per hour
- 1 kg (2 lb.) shrimp, 18 per hour

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Heavy Volume

Menumaster Commercial Microwave Model MSO5211

Power Output

- 2100 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to the table in minutes.
- Unique method of energy distribution provides superior and even heating throughout the cavity.

Easy to Use

- Ample 45 liter (1.6 cubic ft.) cavity accommodates two 102 mm (4) deep full size pans.
- Up to 100 programmable menu items can be used to simplify cooking and ensures consistent results.
- USB port compatible with standard flash drives, updates programming in seconds.
- Four stage cooking options with one-touch programming.
 Reduces prep time, labor and food waste while providing consistent results.
- Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Quantity pad calculates the proper cook times for two servings.
- Transparent door and lit interior allows monitoring without opening the door.
- Interior ceramic shelf is recessed to reduce plate-to-shelf edge impact and keep spills contained.


Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Magnetic front air filter for easy removal and cleaning.
- Clean filter reminder to protect oven components.





Menumaster Commercial Microwave Model MSO5211 | Heavy Volume

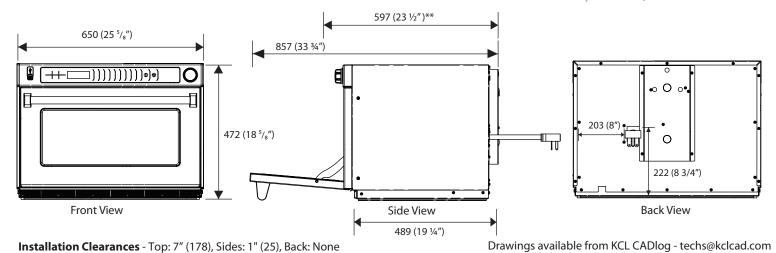

Specifications					
Model	MSO5211 UPC Code 728028315820				
Configuration	Countertop				
Control System	Touch w/ dial				
Programmable Control Pads	10				
Settings Programmable	100				
Max. Cooking Time	60 minutes				
Power Levels	11				
Defrost	Yes, power level 2				
Dial Time Entry	Yes				
Time Entry Option	Yes				
Microwave Distribution	Top and bottom antennas				
Magnetrons	4				
Display	LCD				
Stage Cooking	Yes, 4				
Interior Light	Yes, LED				
Door Opening	Pull down				
Door Construction	Window				
Latch Number	2				
Window Material	Glass				
Air Filter w/Reminder	Yes				
Stackable	Yes				
Signal	Yes				
Automatic Voltage Sensor	No				
Multiple Portion Setting	Yes, x2				
Exterior Dimensions	H 472 (18 \(^8''\) W 650 (25 \(^8''\) D** 597 (23 \(^2'\))				
Cavity Dimensions	H 251 (9 ⁷ / ₈ ") W 535 (21") D 330 (13")				
Door Depth	857 (33 ¾"), drop down door				
Usable Cavity Space	45 liter (1.6 cubic ft.)				
Exterior Finish	Stainless steel				
Interior Finish	Stainless steel with recessed ceramic tray and removable shelf				
Power Consumption	3300 W				
Power Output*	2100 W* Microwave				

230V, 50 Hz, 16A single phase

1.5m (5 ft.)

H 565 (22 ¼") W 768 (30 ¼") D 667 (26 ¼")

0

"Schuko"

CEE 7/7

2450 MHz

66 kg. (146 lb.)

73 kg. (161 lb.)

Power Source

Frequency

Product Weight

Ship weight (approx.)

Shipping Carton Size

Plug Configuration / Cord

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two servings. Cooking timer shall be no more than 60 minutes, countdown style with a time entry option and an adjustable end of cycle audible signal. LCD display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power. Microwave output shall be 2100 watts distributed by four magnetrons, each with a rotating antenna to provide even heating throughout the cavity. Heavy duty door shall have a tempered glass window and a pull down door for easy access. An interior light shall facilitate monitoring without opening the door. The large 45 liter (1.6 cubic ft.) cavity shall accommodate two standard 102 mm (4") deep full size pans. Interior ceramic shelf shall be recessed to reduce plateto-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, NSF for sanitation.

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at: www.acpsolutions.com/warranty







Measurements are in millimeters

- * IEC 60705 Tested
- ** Includes handle