EVOLUTION IN HIGH SPEED **COOKING**

MXP5201 MXP5203

HIGH SPEED COMMERCIAL COMBINATION OVEN

The Menumaster® MXP5201/MXP5203

The new MXP High Speed Oven utilizes an innovative combination of convection, radiant and microwave technology to cook foods up to 15 times faster than traditional cooking methods.

Key Features

- Combination of radiant, convection and microwave to quickly toast and heat a variety of products.
- Up to 360 programmable menu items simplifies cooking and ensures consistent results.
- Catalytic convertor filters grease and odors from air.
- EZCard Menu Management System simplifies menu programming updates. (EZCard Sold Separately)
- User-friendly controls are easy to use and require minimal user training.
- Durable stainless steel exterior and interior for years of commercial foodservice use.
- Available in single and three phase.
- Global service network provides on-going product support.
- Full 1-year warranty includes parts, labor and travel. 3-year warranty on the magentron tube part only.



A Powerful & Cost-Effective Way to ...

- Serve quality food, quickly
- Increase food sales and profits
- Cook fresher, hotter foods on demand

Maximize Your Profits

The powerful MXP High Speed Oven is built to handle the fast pace and grueling demands of the busiest kitchens. It's a high-performing, heavy-duty unit that's ideal for a broad array of foodservice applications.

For more information about any of our fine commercial microwave ovens, visit our website at www.acpsolutions.com





MXP5201 MXP5203


HIGH SPEED COMMERCIAL COMBINATION OVEN

SPECIFICATIONS

UPC Code	MXP5201 MXP5203 705105606101 705105606408	
Configuration	Countertop	
Control System	Touch and dial	
Programmable Control Pad	s 10	
Total Programmable Settin	gs 360	
Power Levels	11	
Maximum Cooking Time	60 minutes	
Program Menu	Multi-level menu capability	
Defrost	Yes, 20% Power	
Time Entry Option	Yes	
Microwave Distribution Sys	tem Rotating Antenna	
Magnetron(s)	2	
Display	LCD, Touch Screen, Backlit	
Stage Cooking	4 stages	
Interior Light	No	
Door Opening System	Pull Down, Ergonomic Designed Handle	
Automatic Voltage Sensor	Yes	
EZCard Menu Management	Yes	
Temperature Range	200 - 520° F	
Temperature Increments	5° F	
Air Filter	Yes, Removable	
Fan Speed	0-100%	
Fan Speed Increments	10%	
Microwave Power	0-100%	
Microwave Power Incremer	nts 10%	
Radiant Level	0-100%	
Radiant Level Increments	10%	
Rack	Removable, one rack position	
Warranty Inc F	Full 1-Year ncludes - 1 Year Full Parts, Labor, and Travel Full 3-Year on magnetron tube part only	

Cabinet	Exterior Dimensions (mm)	Interior Dimensions(mm)	
Height	20-1/4" (514)	10" (7-3/4" from rack) (254)	
Width	25" (635)	16" (406)	
Depth (overall without handle)	25-5/8" (645)	15" (381)	
Depth (door open 90°)	37-5/8" (956)		
Usable Cavity Space	1.07 cubic ft. (30 L)		
Outercase Material	Stainless Steel		
Cavity Interior Finish	Stainless Steel		
Electrical Characteristics	MXP5201	MXP5203	
Power Consumption	5700 W		
Power Output (Microwave)	2200 W		
Power Source	208-240 V, 50 Hz, 32 A single phase	400 V, 50 Hz, Wye, 16 A 3 phase, 5 wire (3L+N+ground)	
Plug Configuration	IEC 309		
Frequency	2450 MHz		
Power Cord Length	5' (1.5 m)		
Weight/Shipping Information	1		
Net Weight	150 lbs. (52 kg)		
Approximate Shipping	175 lbs. (56 kg)		
Shipping Box Size	34.75" W x 28.25" H x 32.5" D (882.65 mm W x 717.55mm H x 825.5 mm D)		

ACP's continuing commitment to quality products may mean a change in specification without notice. Certified to IEC60335-2-90 meeting particular requirement for commercial microwave ovens.

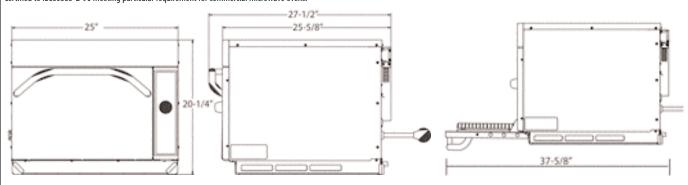

For more information about any of our fine commercial microwave ovens, visit our website at www.acpsolutions.com





